



Stainless Steel Stanchion Saddle Support Figure 59a, 59b, 59c


Service:
Support pipe low to ground.

Material:
304/316 Stainless steel and various alloys.

Ordering:
Specify figure number, standard or ductile iron pipe, size of pipe, distance from center line to the concrete and adjustable or stationary.

NOTE:
The "F" dimension can be modified to meet any specific application requirements.

Each unit has an adjustment handle that can be used to level pipe installations without removal

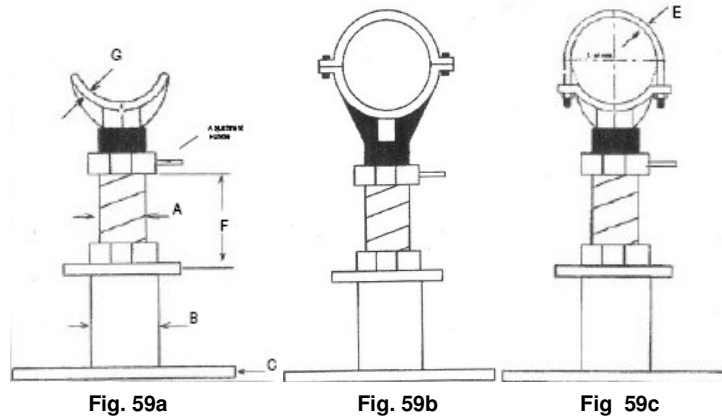

Pipe Size	Vertical Adjustment (F)	Thread Diameter (A)	Pipe Diameter (B)	Base (C)	Hole Diameter (D)	U-Bolt (E)	Stock Size (G)
2	6	1	2	1/4x6x6.	9/16	3/8	3/16x2-1/2
3	6	1	2-1/2	1/4x6x6	9/16	3/8	3/16x2-1/2
4	6	1	2-1/2	1/4x6x6	9/16	1/2	3/16x2-1/2
6	6	1-1/2	2-1/2	1/4x6x6	9/16	1/2	1/4x3
8	6	1-1/2	3	3/8x9x9	11/16	1/2	1/4x3
10	6	1-1/2	3	3/8x9x9	11/16	5/8	1/4x3
12	6	1-1/2	3	3/8x11x11	13/16	3/4	1/4x3
14	8	2	4	3/8x11x11	13/16	3/4	3/8x4
16	8	2	4	3/8x13x13	13/16	7/8	3/8x4
18	10	2	4	3/8x13x13	13/16	7/8	3/8x4
20	10	2	4	3/8x13x13	13/16	1	3/8x4
24	10	2	6	3/8x13x13	13/16	1	3/8x4
30	10	2-1/2	6	3/8x18x18	1-1/8	1	1/2x5
36	10	2-1/2	6	3/8x18x18	1-1/8	1	1/2x5
42	10	3	8	1/2x24x24	1-1/8	1	5/8x6
48	10	3	10	1/2x24x24	1-1/8	1	5/8x6

FM Stainless, LLC
328 Maddox Drive Ellijay, GA 30540
706-636-1881 Fax 706-636-1882
specs@fmstainless.com www.fmstainless.com