



## Stainless Steel Sleeve Anchors


4000 PSI Concrete

Type 304 and 316 Stainless

For safe working loads (allowable loads) do not exceed 25% of ultimate load.

**Note:** 1/4 Diameter available in 304 stainless only.

HEX NUT

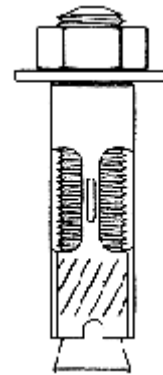

Anchor Size	Embedment	Tension	Shear
		Average Ultimate Load (Pounds)	Average Ultimate Load (Pounds)
1/4 x 1 3/8	1 in.	1505	1920
1/4 x 2 1/4	1 3/4 in.	2160	1897
5/16 x 1 1/2	1 in.	2424	2555
5/16 x 2 1/2	2 in.	2945	3414
3/8 x 1 7/8	1 1/4 in.	2114	4218
3/8 x 3	2 1/2 in.	3988	4638
3/8 x 4	3 1/4 in.	3639	4694
1/2 x 2 1/4	1 1/2 in.	4277	5356
1/2 x 3	2 1/4 in.	5770	5653
1/2 x 4	3 in.	5961	7318
1/2 x 6	4 in.	6513	7690
5/8 x 2 1/4	2 in.	6216	7816
5/8 x 3	2 1/2 in.	6661	7331
5/8 x 4 1/4	3 1/2 in.	9111	7978
5/8 x 6	4 1/2 in.	9991	7870
3/4 x 2 1/2	2 in.	6568	10750
3/4 x 4 1/4	3 1/2 in.	8910	14514
3/4 x 6 1/4	5 in.	11408	13199

### FM Stainless, LLC

328 Maddox Drive Ellijay, GA 30540

706-636-1881 Fax 706-636-1882

[specs@fmstainless.com](mailto:specs@fmstainless.com) [www.fmstainless.com](http://www.fmstainless.com)