



Stainless Steel Sleeve Anchors (Flat Head or Round Head)


4000 PSI Concrete

Type 304 and 316 Stainless

For safe working loads (allowable loads) do not exceed 25% of ultimate load.

Note: 5/8 and 3/4 diameter available in flat head, 1/4 diameter available in 304 stainless only. 304/316 Stainless steel and various alloys.

ROUND FLAT

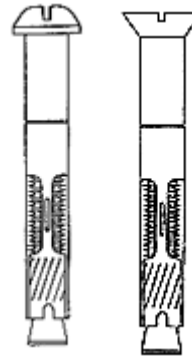

Anchor Size	Embedment	Tension	Shear
		Average Ultimate Load (Pounds)	Average Ultimate Load (Pounds)
1/4 x 2	1 in.	1920	1565
1/4 x 3	1 3/4 in.	1897	2160
3/8 x 3	2 1/2 in.	4638	3988
3/8 x 4	3 1/4 in.	4694	3639
3/8 x 5	4 in.	5535	4920
1/2 x 3	2 1/4 in.	5653	5770
1/2 x 4	3 in.	7318	5961
1/2 x 5	4 in.	9108	8448

FM Stainless, LLC

328 Maddox Drive Ellijay, GA 30540

706-636-1881 Fax 706-636-1882

specs@fmstainless.com www.fmstainless.com